


SystemView 10" tablet with bracket SH-Systemview10



This SystemView 10 inch tablet has a slim and sleek profile for easy mounting. It is equipped with an advanced processor for smooth and high-speed performance. The android tablet features a large capacitive touch screen for easy viewing.

The SystemView 10 is a perfect (low-cost) solution for rugged monitoring in cabinets or as a graphics viewer for web servers.

Dimensions

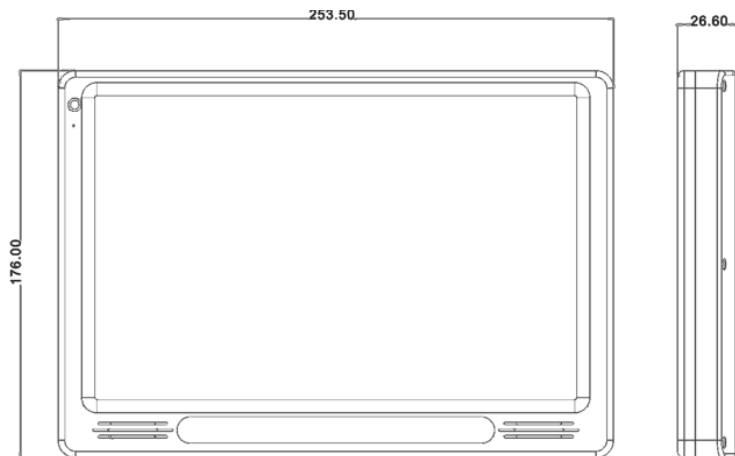

Hardware specification:

Solution	Allwinner's A20 processor, Dual-Core Cortex™-A7 CPU
CPU	ARM Cortex A7 Dual-Core, 1.2Ghz
Display	10.1 Inch IPS Display, Resolution:1280 x 800, Brightness:350 nit, Ratio:16:10
RAM	1GB
Nand Flash	4GB
Sound System	1W * 2
Operating temp	0 to 50 °C (32 to 122 °F)
Operating humidity	10% to 95% relative humidity non-condensing

Software Features:

System	Google Android 4.2.2
Video	H.264 2160p video decoding, Multi-format FHD video decoding, including Mpeg1/2, Mpeg4 SP/ASP GMC, H.263, H.264, VP6/8, AVS jizun, Jpeg/Mjpeg, etc. H.264 High Profile 1080p@30fps or 720@60fps encoding 3840 x 1080@30fps 3D decoding, BD/SBS/TAB/FP supported complies with RTSP, HTTP, HLS, RTMP, MMS streaming media protocols
Audio	Integrated Hi-Fi 100dB audio codec Dual analog mic amplifiers
Language	Support multi-languages
Customized soft	Auto Run Application Software when it is booted

Interfaces:

Back	- Ethernet Interface (RJ45) - USB Socket - DC IN Power Terminal
------	---

Network:

Bluetooth	Bluetooth v2.1+EDR/ Bluetooth 3.0/3.0+HS/4.0
Wi-Fi	WIFI (802.11b/g/n)
LAN Port	Ethernet RJ45

Accessories:

Power Supply	Power Supply: 9~36VDC (at least 1A for 12V) Consumption: Max. 12W
Mounting	Integrated Onwall Mount VESA Bracket