## Air Quality Sensors

Rev. 12/04/19



## Features & Options

- Field Replaceable Electrochemical Sensor with Self-Test
- Optional BACnet MS/TP Output of CO, Temp and Humidity
- Field Selectable Voltage Outputs
- Optional Temperature and Humidity Measurement

BAPI's Carbon Monoxide Rough Service Sensor offers enhanced electrochemical sensing with outstanding accuracy at low concentrations. It features a ventilated BAPI-Box and is ideal for parking ramps, equipment rooms and warehouses.

The sensor has a CO range of 0 to 500 ppm with field selectable outputs of 0 to 5, 1 to 5, 0 to 10 and 2 to 10 VDC. It includes optional humidity measurement with one of the above voltage outputs, and temperature via a 10K-2, 10K-3 or 20K Thermistor. The CO, temperature and humidity outputs are also available via BACnet MS/TP.

The field replaceable sensor element lasts approximately 7 years and is self-tested daily.



## Specifications

#### Power:

0 to 5 or 1 to 5 VDC Output 9 to 40 VDC, 10 mA Max 12 to 28 VAC, 1.4 VA Max

0 to 10 or 2 to 10 VDC Output 12 to 40 VDC, 10 mA Max 12 to 28 VAC, 1.4 VA Max

BACnet Output 9 to 40 VDC, 35 mA Max 12 to 28 VAC, 1.7 VA Max

CO Measurement Range: 0 to 500 ppm

Field Wiring Terminals: Flying Leads, 22 AWG

**Response Time:** <80 seconds from 10% to 90% of range **Sensor Element Life:** 7 Years Typical Field Selectable Voltage Outputs 0 to 5, 1 to 5, 0 to 10 and 2 to 10 VDC

**Carbon Monoxide Sensor Accuracy:** <200ppm = ±3% FS, 32 to 122°F (0 to 50°C) 201 to 500 ppm = ±5% FS, 50 to 122°F (10 to 50°C)


**Temperature Sensor Accuracy:** BACnet Units: ±0.3°C from -40 to 257°F (-40 to 125°C) Thermistor Units: See "Sensors" section for specs

Humidity Sensor Accuracy: ±2% RH (20% to 80%) @ 25°C, Fully Compensated

Environmental Operation Range Continuous: 32 to 122°F (0 to 50°C) 5 to 95%RH Noncondensing

Intermittent: -40 to 131°F (-40 to 55°C) 5 to 95%RH Noncondensing

Certifications: RoHS and CE

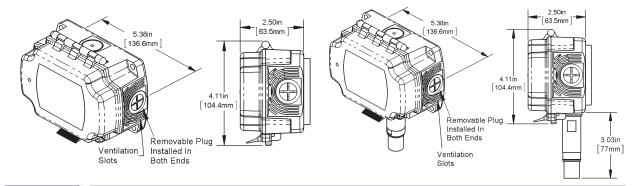



Building Automation Products, Inc. • 750 North Royal Avenue, Gays Mills, WI 54631 USA Tel: +1-608-735-4800 • Fax: +1-608-735-4804 • Email: sales@bapihvac.com • Web: www.bapihvac.com



# **D21**

# **Ordering Information**

<u>Part #</u>	Description
BA/BBV-CO	Rough Service CO Sensor
BA/BBV-COV-103-H	Rough Service CO Sensor with 10K-2 Thermistor Temp and %RH Rough Service CO Sensor with 10K-3 Thermistor Temp and %RH Rough Service CO Sensor with 20K Thermistor Temp and %RH
	Rough Service CO Sensor with BACnet Output Rough Service CO Sensor with Temp, %RH and BACnet Output



